



Light makes the difference

HVP Lighting nv - Waregemstraat 200 - 8540 Deerlijk - T 056/72 97 61 - F 056/72 61 53 - info@hvplighting.com - www.hvplighting.com

UX-DOWNLIGHT 202 Spango MAT IP44

CONSTRUCTION

Housing: galvanized sheet
Reflectors: aluminium with various types of surface finish - polished, mat
Reflector cover: sandblasted hardened glass
Ring: sheet steel, electrostatic powder coat finish RAL 9003 (signal white), other finish types - RAL 9006 (white aluminium), chrome or brass available on request
Ballast box: galvanized sheet steel, holders to prevent conductors from loosening off the terminal box, two rubber reducing adapters for conductors (through mounting possible)
 Ceiling attachment of the luminaire is done using two metal springs, adjustable for various ceiling widths. The cover glass is attached to the luminaire using three springs allowing fast and tool-free light source replacement.





ELECTRICAL COMPONENTS

Electronic (EEI=A2) or dimmable electronic ballasts (EEI=A1, 1-10V, DALI)
 Light sources shall be ordered separately.

ACCESSORIES

- an independent metal box for separate placement of the ballast apart from the luminaire (separate gearbox version):
- on request, they can be delivered with one or two connectors allowing fast electrical connection: 3-pole connectors Wieland gesis GST 18i3, Wago Winsta 770, AAG Stucchi 1601A/1602A

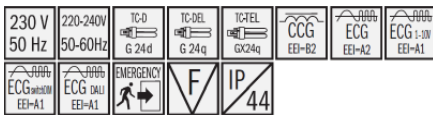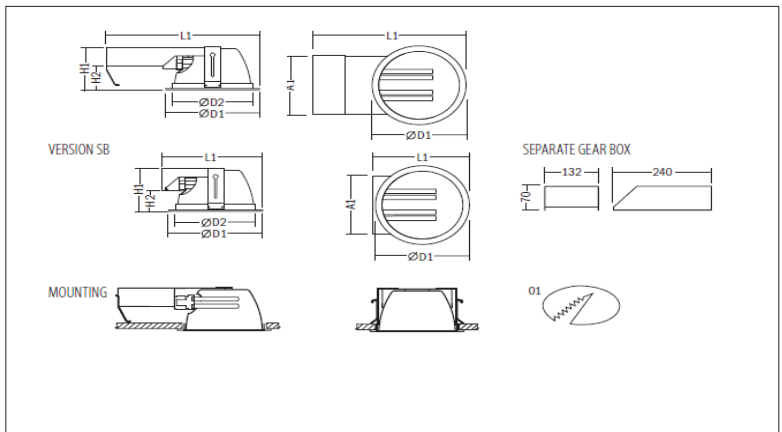

	optic	watt	lamp	Dimensions						colour	opening	
				D1	D2	L1	L1/SB	H1	H2			A1
UX-Downlight 202 Spango	Mat	2x13W	Dulux D/E	195	155	305	212	110	54	152	white	175
UX-Downlight 202 Spango	Mat	2x18W	Dulux D/E	195	155	305	212	110	54	152	white	175
UX-Downlight 202 Spango	Mat	2x26W	Dulux D/E	195	155	305	212	110	54	152	white	175